




CARGO CONTROL



PHONE (920) 851-5845 • FAX (920) 734-7615 • APPLETON, WI 54911

Classic WEB TYPE 10 - Multi-Leg Bridles (MLB)

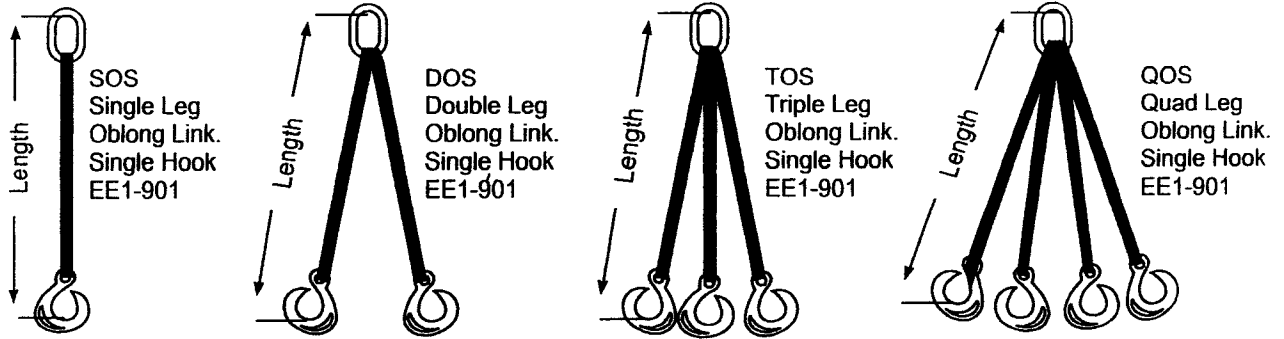

Because the lifting of loads is a vital operation, and the sling user's needs are frequently unique, virtually all sling orders are custom made. Therefore, it is essential that each order provide the following information to guide manufacturing:

HOW TO ORDER

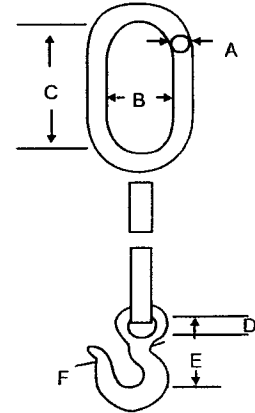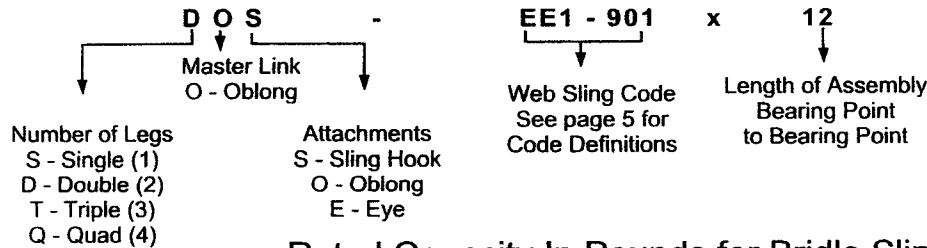

Rated Capacity In Pounds for Bridle Slings

Stock No.	Width	Ply	Number of Legs	Rated Capacity				Oblong Link Dimensions (inches)			Sling Hook Dimensions (inches)			Hook Sizes
				90°	60°	45°	30°	A	B	C	D	E	F	
EE1-901	1	1	Single	1600	1300	1100	800	1/2	2-1/2	5	3/4	3-1/8	1	1TA*
EE1-901	1	1	Double	3200	2700	2200	1600	1/2	2-1/2	5	3/4	3-1/8	1	1TA
EE1-901	1	1	Triple	4800	4100	3300	2400	3/4	3	6	3/4	3-1/8	1	1TA
EE1-901	1	1	Quad	6400	5500	4500	3200	1	4	6	3/4	3-1/8	1	1TA
EE2-901	1	2	Single	3000	2500	2100	1500	1/2	2-1/2	5	7/8	3-21/32	1-1/16	1-1/2TA
EE2-901	1	2	Double	6000	5100	4200	3000	3/4	3	6	7/8	3-21/32	1-1/16	1-1/2TA
EE2-901	1	2	Triple	9000	7700	6300	4500	3/4	3	6	7/8	3-21/32	1-1/16	1-1/2TA
EE2-901	1	2	Quad	12000	10300	8400	6000	1	4	8	7/8	3-21/32	1-1/16	1-1/2TA
EE1-902	2	1	Single	3000	2500	2100	1500	1/2	2-1/2	5	7/8	3-21/32	1-1/16	1-1/2TA
EE1-902	2	1	Double	6000	5100	4200	3000	3/4	3	6	7/8	3-21/32	1-1/16	1-1/2TA
EE1-902	2	1	Triple	9000	7700	6300	4500	3/4	3	6	7/8	3-21/32	1-1/16	1-1/2TA
EE1-902	2	1	Quad	12000	10300	8400	6000	1	4	8	7/8	3-21/32	1-1/16	1-1/2TA
EE2-902	2	2	Single	6000	5100	4200	3000	3/4	3	6	1-1/4	4-11/16	1-1/4	3TA
EE2-902	2	2	Double	12000	10300	8400	6000	1	4	8	1-1/4	4-11/16	1-1/4	3TA
EE2-902	2	2	Triple	18000	15500	12700	9000	1	4	8	1-1/4	4-11/16	1-1/4	3TA
EE2-902	2	2	Quad	24000	20700	16900	12000	1-1/4	4-3/8	8-3/4	1-1/4	4-11/16	1-1/4	3TA

*TA = Ton Alloy
 Identify by code, leg and end attachments.
 Other end attachments available.
 Capacities of Hardware correspond to the Sling Capacities.

WARNING: Do not exceed rated capacities. Ratings must be reduced when slings are used at angles of less than 90° from horizontal.