

L&M CARGO CONTROL

WINCH STRAP - TIEDOWN SYSTEMS



PRODUCT CODE	DESCRIPTION	WLL LBS	PK	LBS EA.	WD-NET PRICE
--------------	-------------	---------	----	---------	--------------

2" ASSEMBLY BREAK STRENGTH = 10,000 LBS.

WS-2-27-FH	WINCH STRAP 2"x27' W/ FLAT HOOK	3,335	10	3	
WS-2-30-FH	WINCH STRAP 2"x30' W/ FLAT HOOK	3,335	10	3.2	

3" ASSEMBLY BREAK STRENGTH = 12,000 LBS.

WS-3-27-CH	WINCH STRAP 3"x 27' W/ CHAIN ANCHOR	4,300	10	5.3	
WS-3-30-CH	WINCH STRAP 3"x 30' W/ CHAIN ANCHOR	4,300	10	5.6	
WS-3-27-HK	WINCH STRAP 3"x 27' W/ 3/8" GRAB HOOK	4,300	10	3.8	
WS-3-30-HK	WINCH STRAP 3"x 30' W/ 3/8" GRAB HOOK	4,300	10	4.1	
WS-3-27-FH	WINCH STRAP 3"x 27' W/ FLAT HOOK	4,300	10	3.9	
WS-3-30-FH	WINCH STRAP 3"x 30' W/ FLAT HOOK	4,300	10	4.2	

4" ASSEMBLY BREAK STRENGTH = 15,000 LBS.


WS-4-27-FH	WINCH STRAP 4"x 27' W/ FLAT HOOK	5,000	10	4.8	
WS-4-30-FH	WINCH STRAP 4"x 30' W/ FLAT HOOK	5,000	10	5.2	
WS-4-27-CH	WINCH STRAP 4"x 27' W/ CHAIN ANCHOR	5,000	8	6.7	
WS-4-30-CH	WINCH STRAP 4"x 30' W/ CHAIN ANCHOR	5,000	8	7.1	
WS-4-27-HK	WINCH STRAP 4"x 27' W/ 3/8" GRAB HOOK	5,000	10	1	
WS-4-30-HK	WINCH STRAP 4"x 30' W/ 3/8" GRAB HOOK	5,000	10	5.4	
WS-4-27-DR	WINCH STRAP 4"x 27' W/ DELTA RING	5,000	10	5	
WS-4-30-DR	WINCH STRAP 4"x 30' W/ DELTA RING	5,000	10	5.4	
WS-4-30-SE	WINCH STRAP 4"x 30' W/ SEWN EYE LOOP	5,000	10	4.5	

4" ASSEMBLY BREAK STRENGTH = 15,000 LBS. / WIDE LOADS

35 FEET & 40 FEET

WS-4-35-FH	WINCH STRAP 4"x 35' W/ FLAT HOOK	5,000	10	6.7	
WS-4-40-FH	WINCH STRAP 4"x 40' W/ FLAT HOOK	5,000	10	7	


WINCH BINDERS-ALLWORK LOAD LIMITS ARE STAMPED 5000 LB. FOR D.O.T.

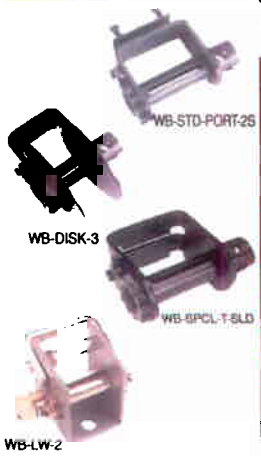

WB-LP-EZ-SLD	LOW PROFILE EASY SLIDE - NOTCHED	5	9.3	
WB-STD-WO	STANDARD WELD ON	5	8	
WB-STD-LP-WO	STANDARD LOW PROFILE	5	7.3	
WB-STD-PORT-2S	STANDARD PORTABLE W/ 2-SET SCREWS	5	9.6	
WB-LP-PORT-2S	LOW PROFILE PORTABLE W/ 2-SET SCREWS	5	8.5	
WB-STD-EZ-SLD	STANDARD EASY SLIDE - NOTCHED	5	9.1	
WB-DEEP-EZ-SLD	DEEP / STORABLE EASY SLIDE - NOTCHED	5	10.5	
WB-SPCL-T-SLD	SPECIAL DESIGN TRACK WINCH - SLIDER	5	8	
WB-STD-COMBO-WO	STD COMBO W/ POST FOR CABLE & WEBBING	5	10	
WB-LW-2	LASHING WINCH FOR 2" WEBBING	5	3.4	
WB-DISK-3	3" STORAGE SPOOL	5	10.5	
	4" STORAGE SPOOL	5	10.5	

> DIMENSIONS ARE INDUSTRY STANDARD

WINCH BARS



WBA-C-C	WINCH BAR - COMBINATION - 32" - CHROMED	5	6.4	
WBA-CB-C	WINCH BAR - COMBO W/ BOX END - 36" - CHROMED	5	6.8	
WBA-CB-P	WINCH BAR - COMBO W/ BOX END - 36" - PAINTED	5	6.8	
WBA-S-C	WINCH BAR - STANDARD - 32" - CHROMED	5	5	
WBA-S-P	WINCH BAR - STANDARD - 32" - PAINTED	5	5	

WARNING: WEBBING STRAPS

Webbing straps (binders) must be protected when used across rough or sharp objects. All strap assemblies require inspection each time they are used. Straps that are cut, worn or otherwise damaged should not be used. **Strap assemblies should never be tied into knots or allowed to become knotted. All straps are load control devices and should never be used for overhead lifting.** Working load requirements should be evaluated by the user before selecting appropriate hardware & strap assemblies. **All binder assemblies or systems are only as strong as the weakest component, including the point of attachment.** For other product warnings please see other pages.

L&M CARGO CONTROL / PHONE (920) 851-5845 / FAX (920) 734-7615