




CARGO CONTROL





PHONE (920) 851-5845 • FAX (920) 734-7615 • APPLETON, WI 54911




Classic WEB

TYPE 9 - Load Balancer Basket (LBB)

Rated Capacity In Pounds

STOCK NO.	WIDTH	PLY	BASKET HITCH CAPACITY				EYE WIDTH W	EYE LENGTH L
								
LBB-1-606	6"	1	3000	2600	2100	1500	1"	9"
LBB-1-906	6"	1	6000	5200	4200	3000	1"	9"
LBB-1-608	8"	1	3000	2600	2100	1500	1"	12"
LBB-1-908	8"	1	6000	5200	4200	3000	1"	12"
LBB-1-610	10"	1	3000	2600	2100	1500	1"	12"
LBB-1-910	10"	1	6000	5200	4200	3000	1"	15"
LBB-1-612	12"	1	3000	2600	2100	1500	1"	18"
LBB-1-912	12"	1	6000	5200	4200	3000	1"	18"
LBB-1-616	16"	1	5000	4300	3500	2500	2"	18"
LBB-1-916	16"	1	10000	8700	7100	5000	2"	24"
LBB-1-620	20"	1	5000	4300	3500	2500	2"	24"
LBB-1-920	20"	1	10000	8700	7100	5000	2"	24"
LBB-1-624	24"	1	5000	4300	3500	2500	2"	24"
LBB-1-924	24"	1	10000	8700	7100	5000	2"	24"

*Narrower taper available on special request only.

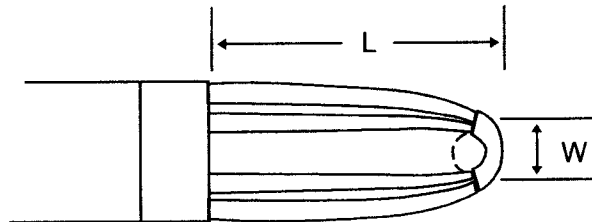

Designed for use where sling width is required for load stability and for protection of finished surfaces or fragile loads. These slings have lower rated capacity than the Wide Body Basket. Eyes are constructed to fit properly on small hoist hooks.